# SAAYA 69-Silk collection



NB: The portrayed colours may differ from reality.



69-2340 SMOKE



69-2341 ELDERFLOWER



69-2342 ALMOND



69-2343 OAK





69-2345 CAPPUCCINO



69-2346 JACOBEAN



69-2347 MIST



69-2348 MUSHROOM

69-2349 CHARCOAL

## **Specification**

Name Saaya

110 cm - 43" Width approx.

Weight approx. : 300 gr / lm oz / Inyd : 9.7

Thickness approx. 0.54 mm

Composition silk : 92% recycled polyester : 8%

Weaving technique plain woven

Dyeing yarn dyed

Backing reinforced woodpulp : 70% recycled polyester : 30%

Repeat approx. height : 64cm - 25.2"

width

Hanging random, pattern cannot be matched,

non-reverse

Scan QR-code for more details, visuals and video content.



**Performance** Please contact info@tapetex.com for more detailed test reports.

Surface finish A stain repellent finish prevents waterbased splashes penetrating and staining the material.

Periodic vacuuming is recommended to prevent dust from building up on the materials surface.

Lightfastness Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest.

LRV values Testing as per BS 8493:2008+A1:2010, Datacolor DC500. Fire rating ASTM E84 Class 1 or A and EUROCLASS (B s1 d0).

Permeability rating Test result 40.6 as per ASTM E96-12, Method B, Water Vapor Transmission.

Indoor air quality ASTM D6196, D5197 and D5116, Environmental Chamber Test.

The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating

Chemical Emissions".

REACH SVHC Compliant as per Centexbel testing.
DoP No. (CPR 305/2011), DOP-CPR-01







Lightfastness: as per ISO 105-B02:2014



Light reflection: as per BS 8493: 2008+A1:2010 Datacolor DC500



Fire resistant: EU: B, s1-d0 US: ASTM E84 Class 1 or A



Permeability rating: 40.6, as per ASTM E96-



Indoor air quality: ASTM D6196, D5197 and D5116



#### Sustainability

Silk is a 100% renewable natural resource. The backing is FSC certified, FSC A000531.

In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

#### Supply and packing

Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 50 linear meter or 55 linear yards. However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

## Harmonized System as per the World Customs Organization and Origin

Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.













## **Hanging details**

Hanging Random, pattern hight 64 cm (25.2") pattern cannot be matched, non-reverse.

Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll.

Use rubber roller instead of spatula.

Adhesive Use a premixed heavy duty, clear vinyl adhesive, suitable for textile wallcovering.

Variation There can be a variation between sample material and finished product.

Stock cuttings are available for approval.













Precision trimmed

Sold by the meter/yard


Direction of hanging


Use a rubber roller

Don't use a spatula

Apply adhesive on the wall

### View

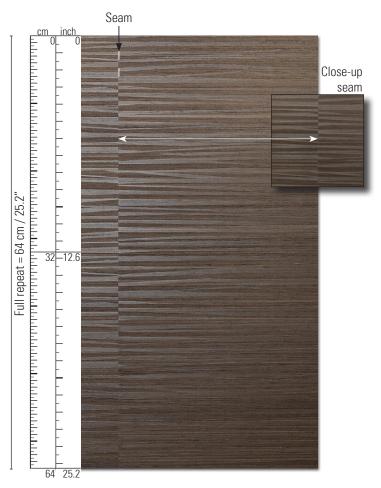

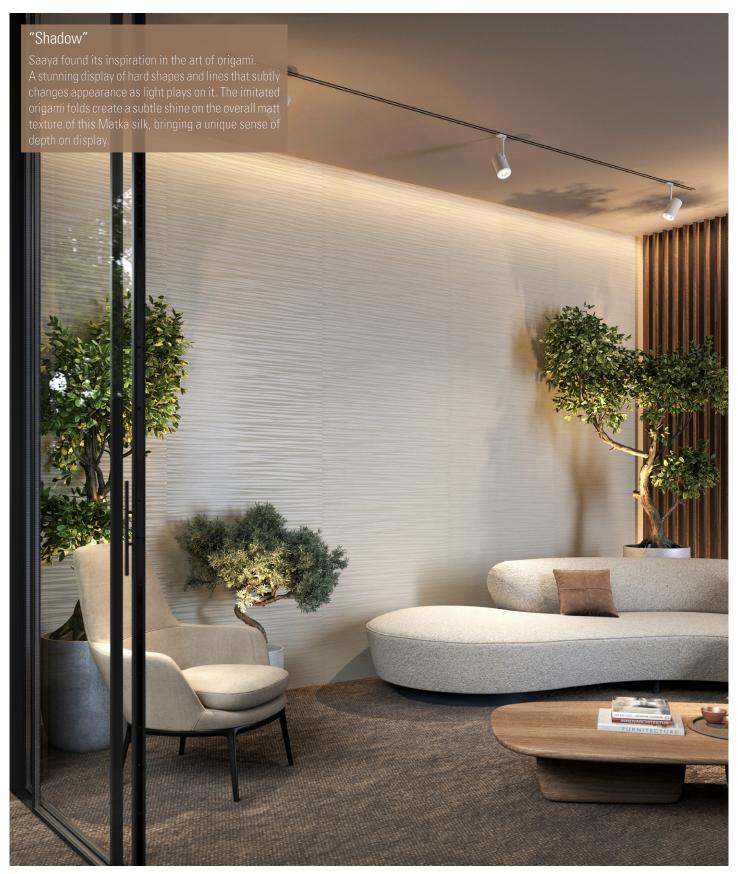

Saaya 69-2341